




GMK3050

All Terrain Hydraulic Crane



Dimensions

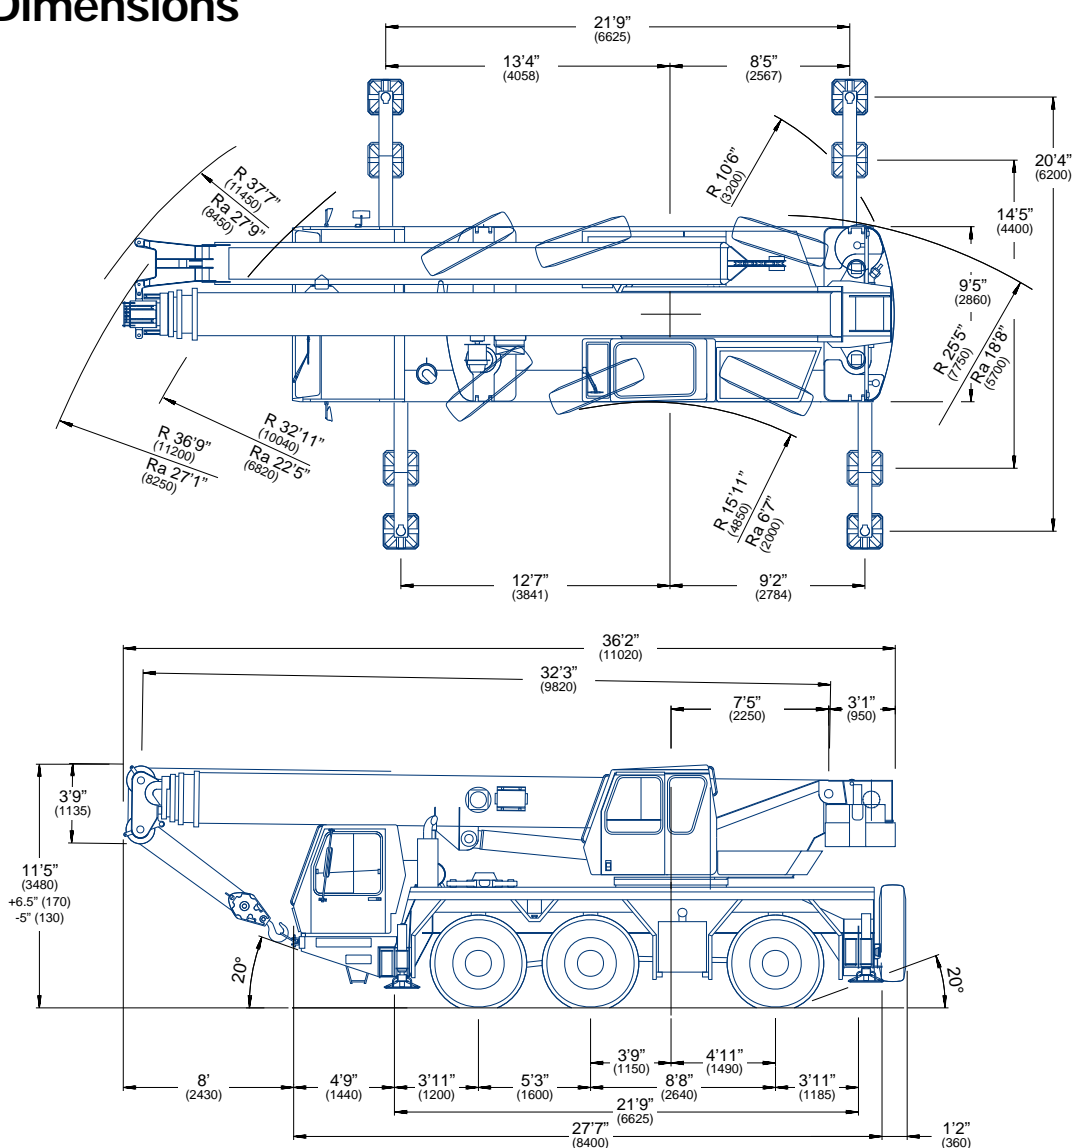

Note: () Reference dimensions in mm


BASIC WEIGHTS (LBS.)	Axles 1 & 2	Axle 3	Total
With Mercedes Power, 6x4x6, 20.5 R25 Tires, 12,500 lbs Fixed Counterweight Hydraulic Oil Cooler, Brackets for Lattice Extension	45,632	28,548	74,180
Additions:			
Outrigger Pads	227	104	331
Auxiliary Hoist	-(712)	1,947	1,235
Lattice Extension - 28/49 ft	2,895	-(955)	1,940
Rooster Sheave	293	-(181)	112
6 x 6 Drive	962	-(168)	794
Electric Driveline Retarder	44	375	419
16.00 R25 Tires in lieu	-(370)	-(186)	-(556)
14.00 R25 Tires in lieu	-(899)	-(450)	-(1,349)
Spare Tire - 14.00 R25 (with stowage bracket)	-(282)	866	584
Spare Tire - 16.00 R25 (with stowage bracket)	-(352)	1,069	717
Spare Tire - 20.5 R25 (with stowage bracket)	-(408)	1,217	809



Working range




32 - 125 ft.
(9.8 - 38.1 m)



28 - 49 ft.
(8.7 - 15 m)



23,100 lbs.
(10,500 kg)




100%



360°

FEET

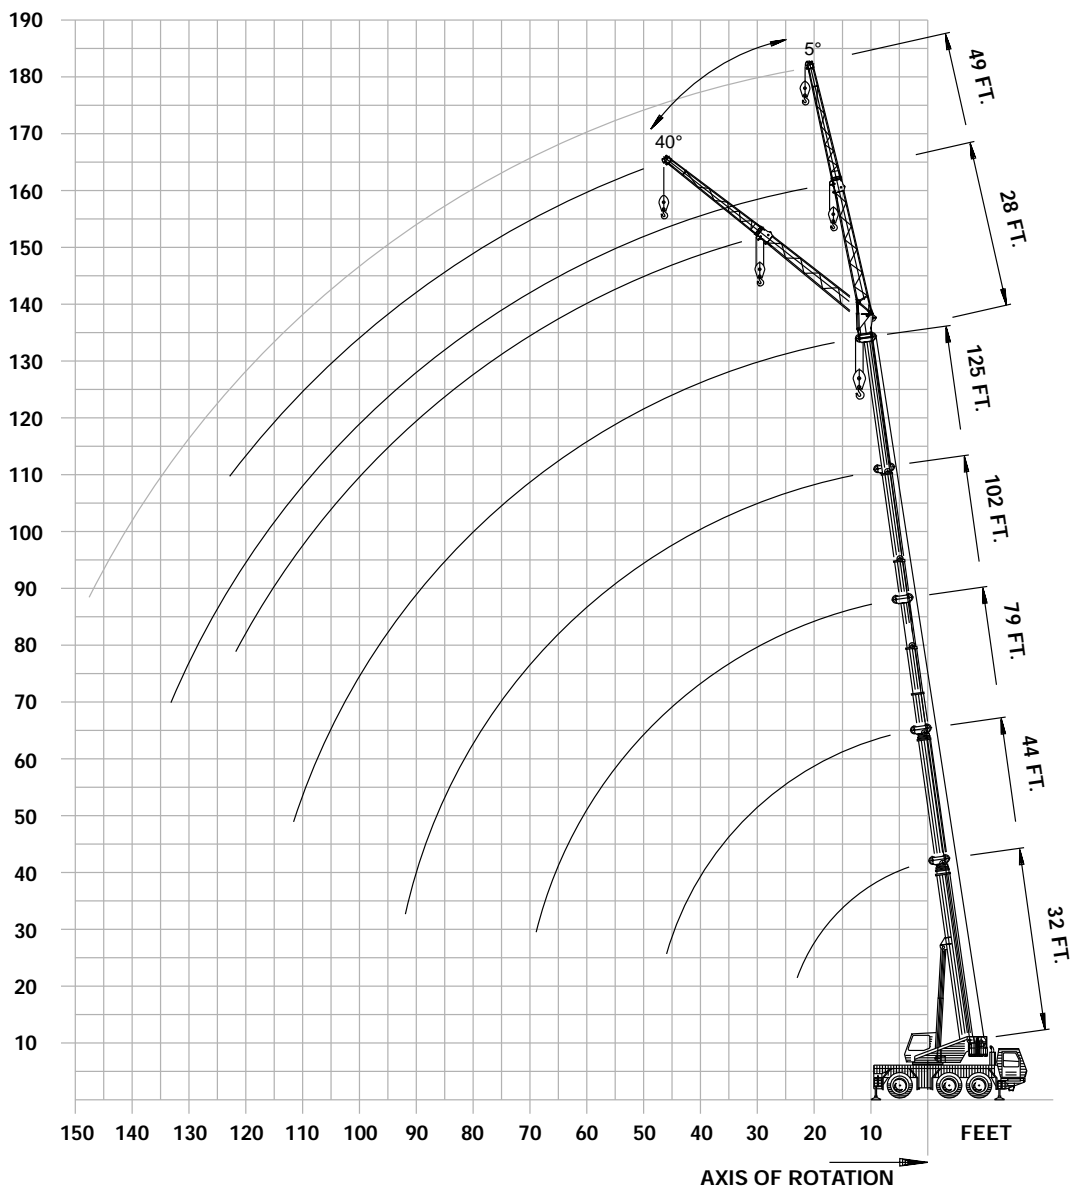

Superstructure specifications

Boom

32 ft. - 125 ft. (9.8 m - 38.1 m) five section, full-power boom. Maximum tip height: 133 ft. (40.5 m).

Boom Elevation

Single lift cylinder with safety valve provides boom angle from -3° to +82°.

Lattice Extension

28 ft. - 49 ft. (8.7 m - 15 m) lattice swingaway extension. Hydraulic offset / luffing capability 5° - 40°.

Load Moment & Anti-Two Block System

Load moment and anti-two block system with audio/visual warning and control lever lockout provides electronic display of boom angle, length, radius, tip height, relative load moment, maximum permissible load, load indication and warning of impending two-block condition.

Cab

Full vision aluminum cab, safety glass windows and adjustable operator's seat with hydraulic suspension. Other features include engine independent heater, arm-rest integrated crane controls, and ergonomically arranged instrumentation for carrier and superstructure.

Swing

Axial piston motor with planetary gear. Holding and service brake. Swing speed variable from 0 - 2.5 RPM.

Counterweight

23,150 lbs. (10 500 kg) consisting of various sections with hydraulic installation/removal system controlled from the cab.

Hydraulic system

Two separate open pump circuits with one axial piston variable displacement pump (load sensing) and one gear pump for swing. Thermostatically controlled oil cooler.

159 gallon (600 L) reservoir capacity.

All crane movements infinitely variable by hydraulic pilot circuit control levers with automatic reset to zero.

HOIST SPECIFICATIONS

Main Hoist

Axial piston variable displacement motor with planetary gear and multiple disc brake. Rope drum with special grooving. "Thumb-thumper" hoist drum rotation indicator alerts operator of hoist movement.

Single line pull: 9,900 lbs.
(44 kN)

Single line speed: 394 ft./min.
(120m/min)

Rope diameter: 16 mm

Rope length: 492 ft.
(150 m)

Auxiliary Hoist

Axial piston variable displacement motor with planetary gear and multiple disc brake. Rope drum with special grooving. "Thumb-thumper" hoist drum rotation indicator alerts operator of hoist movement.

Single line pull: 9,900 lbs.
(44 kN)

Single line speed: 394 ft./min.
(120m/min)

Rope diameter: 16 mm

Rope length: 492 ft.
(150 m)

* Optional equipment

- *Second spotlight
- *Stereo/cassette player
- *Air Conditioning

*Denotes optional equipment



Carrier specifications

Chassis

Box-type, torsion resistant frame is fabricated from high-strength steel.

Outrigger System

Four hydraulically telescoping beam outriggers with vertical cylinders and outrigger pads. Outriggers can be set in 2 positions:

Fully extended (100%) - 20' 4" (6.2m)

Partially extended (50%) - 14' 5" (4.4m)

Independent horizontal and vertical movement control on each side of the carrier and from the crane operator's cab. Crane level indicators at each control station.

Engine

Mercedes-Benz OM501LA, diesel, 6 cylinders, water cooled, turbo charged and aftercooled, 349 HP (260 kW) at 1800 rpm. Max. torque: 1,276 ft./lbs. (1730 Nm) at 1080 rpm.

Engine emission: EURO II/EUROMOT/EPA/CARB (off highway).

Fuel Tank Capacity: 95 gallons. (360 L).

Transmission

Allison automatic MD 3066 P, 6 forward and 1 reverse speed. Transfer case with 2 speeds, inter-axle differential lock and integrated central power take-off for the second axle line.

Drive/Steer

6 x 4 x 6

Axles

1st axle line - steer.

2nd axle line - drive/steer.

3rd axle line - drive/steer.

Drive axles with planetary hub reduction and center mounted gearing

Suspension

GMK3050 features the Grove exclusive MEGATRAK† suspension. This revolutionary design features an independent hydroneumatic system with hydraulic lockout acting on all wheels. The suspension can be raised 6-1/2" (170 mm) or lowered 5" (130 mm) both longitudinally and transversely and features an automatic leveling system for on-highway travel.

Tires

6 tires, 20.5 R25.

Steering

Dual circuit, Servocom power steering with emergency steering pump. Axles 1 and 2 steer on highway. Separate steering of the 3rd axle line for all-wheel steering and crab-steer is controlled by an electric rocker switch.

Brakes

Service brake: pneumatic dual circuit acting on all wheels, air dryer. Permanent brake: exhaust brake and constant throttle brake is standard.

Parking brake: pneumatically operated spring-loaded, acting on 2nd and 3rd axle lines.

Cab

Aluminum, two-man design, safety glass, driver's seat with hydraulic suspension, engine-dependent hot water heater. Complete instrumentation and driving controls. Cab can be tilted forward by 60° for easy access to engine, transmission, hydraulic pumps, heater and batteries.

Electrical system

24 V system with three-phase alternator 28 V/100 A, 2 batteries 12 V/170 Ah.

Maximum Speed

53 mph (85 km/h) with 20.5 R25 Tires

Gradeability (theoretical)

52% with 20.5 R25 Tires

Miscellaneous standard equipment

Additional hydraulic oil cooler; spare tire and wheel - 20.5 R25 with carry bracket; flashing amber warning light on carrier cab; working light; tool kit; fire extinguisher; rooster sheave; radio cassette in carrier cab.

* Optional equipment

* 6 x 6 x 6

* Electric driveline retarder

* 16.00 R25 tires (vehicle width 9 ft. [2.75 m])

* 14.00 R25 tires (vehicle width 8 ft. 2 in. [2.50 m])

* Engine-independent hot water heater, with engine pre-heater


* Trailing boom kit (less dolly)


* Air conditioning


* Denotes optional equipment


† "G MEGATRAK" (and design) is a trademark of Grove U.S. L.L.C.




 **32 - 125 ft.**
(9.8 - 38.1 m)

 **23,150 lbs.**
(10,500 kg)

 **100%**
20'4" Spread


 **360°**


Feet	Pounds									
	32	44	55	67	79	90	102	113	125	
10	*110,000									
10	108,000	67,000	67,000	38,800	38,800	36,400				
15	81,000	61,000	67,000	38,800	38,800	36,400	26,600	20,600		
20	61,000	50,000	56,000	38,800	38,800	36,400	26,600	20,600	17,400	
25		42,000	43,800	38,800	37,600	34,600	26,400	20,600	17,400	
30		35,200	36,400	33,000	32,800	30,000	24,600	20,400	17,400	
35			28,200	26,200	26,200	26,000	22,400	20,200	17,400	
40			22,600	23,200	21,000	21,400	20,400	20,000	17,200	
45			18,600	19,200	17,000	17,600	17,800	17,800	16,800	
50				16,200	14,600	16,000	15,000	15,200	15,200	
55					13,600	14,400	13,400	13,000	13,000	
60					12,000	12,400	12,400	11,000	11,200	
65					10,400	10,600	10,800	9,200	9,600	
70						9,200	9,400	7,800	8,200	
75						8,000	8,200	6,600	7,000	
80							7,200	5,600	6,000	
85							6,400	4,800	5,000	
90							5,600	4,000	4,200	
95								3,400	3,600	
100									3,000	
105									2,400	
110									2,000	





	T1	T2	T3	T4						
T1	0	50/0	100/0	100/0	100/0	100/0	100/0	100	100	100
T2	0	0/17	0/33	17/50	33/67	50/83	67/100	83	100	100
T3	0	0/17	0/33	17/50	33/67	50/83	67/100	83	100	100
T4	0	0/17	0/33	17/50	33/67	50/83	67/100	83	100	100

* Over rear only.
Lifting capacities greater than 97,000 lbs (44,000 kg) require additional equipment.
NOTE: Above loadchart also available with 50% outriggers.


 **32 - 125 ft.**
(9.8 - 38.1 m)

 **15,400 lbs.**
(7,000 kg)

 **100%**
20'4" Spread

 **360°**

Feet	Pounds									
	32	44	55	67	79	90	102	113	125	
10	*110,000									
10	108,000	67,000	67,000	38,800	38,800	36,400				
15	81,000	61,000	67,000	38,800	38,800	36,400	26,600	20,600		
20	58,000	50,000	52,000	38,800	38,800	36,400	26,600	20,600	17,400	
25		38,800	38,800	36,400	35,800	34,600	26,400	20,600	17,400	
30		30,000	31,200	29,200	27,400	27,000	24,600	20,400	17,400	
35			24,000	24,600	21,600	21,600	21,400	20,200	17,400	
40			19,200	19,600	17,400	19,400	17,600	17,200	17,000	
45			15,400	16,000	16,000	16,800	16,000	14,400	14,200	
50				13,200	13,600	14,000	14,200	12,000	12,000	
55					11,400	11,800	12,000	10,200	10,200	
60					9,600	10,000	10,200	8,400	8,600	
65					8,000	8,400	8,600	7,000	7,200	
70						7,200	7,400	5,800	6,000	
75						6,200	6,400	4,800	5,000	
80							5,400	3,800	4,200	
85							4,600	3,200	3,400	
90							4,000	2,400	2,800	
95								1,800	2,200	
100									1,600	



	T1	T2	T3	T4						
T1	0	50/0	100/0	100/0	100/0	100/0	100/0	100	100	100
T2	0	0/17	0/33	17/50	33/67	50/83	67/100	83	100	100
T3	0	0/17	0/33	17/50	33/67	50/83	67/100	83	100	100
T4	0	0/17	0/33	17/50	33/67	50/83	67/100	83	100	100

* Over rear only.
Lifting capacities greater than 97,000 lbs (44,000 kg) require additional equipment.
NOTE: Above loadchart also available with 50% outriggers.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.



 32 - 125 ft.
(9.8 - 38.1 m)
 12,500 lbs.
(5,700 kg)
 100%
20'4" Spread
 360°

Feet	Pounds									
	32	44	55	67	79	90	102	113	125	
10	*110,000									
10	108,000	67,000	67,000	38,800	38,800	36,400				
15	80,000	61,000	67,000	38,800	38,800	36,400	26,600	20,600		
20	57,000	50,000	48,000	38,800	38,800	36,400	26,600	20,600	17,400	
25		38,800	38,800	34,000	33,400	32,600	26,400	20,600	17,400	
30		28,200	29,200	29,200	25,400	25,000	24,600	20,400	17,400	
35			22,400	23,000	19,800	21,200	19,800	19,400	17,400	
40			17,600	18,200	17,400	18,800	17,600	15,800	15,600	
45			14,200	14,800	15,200	15,400	15,600	13,000	13,000	
50				12,000	12,400	12,800	13,000	10,800	10,800	
55					10,400	10,600	10,800	9,000	9,000	
60					8,600	9,000	9,200	7,600	7,600	
65					7,200	7,600	7,800	6,200	6,400	
70						6,400	6,600	5,000	5,400	
75						5,400	5,600	4,000	4,400	
80							4,800	3,200	3,600	
85							4,000	2,600	2,800	
90							3,400	1,800	2,200	
95									1,600	

	T1	T2	T3	T4						
T1	0	50/0	100/0	100/0	100/0	100/0	100/0	100/0	100	100
T2	0	0/17	0/33	17/50	33/67	50/83	67/100	83	83	100
T3	0	0/17	0/33	17/50	33/67	50/83	67/100	83	83	100
T4	0	0/17	0/33	17/50	33/67	50/83	67/100	83	83	100

* Over rear only.
 Lifting capacities greater than 97,000 lbs (44,000 kg) require additional equipment.
 NOTE: Above loadchart also available with 50% outriggers.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.

GMK3050





FIXED LATTICE EXTENSION

Pounds												
Feet	102 FT MAIN BOOM						125 FT MAIN BOOM					
	5°	28 FT 20°	40°	5°	20°	40°	5°	28 FT 20°	40°	5°	20°	40°
20	10,000			6,000								
25	10,600			6,600								
30	10,600	10,600		6,600			8,400					
35	10,600	10,200	8,400	6,600			8,400			5,400		
40	10,600	9,800	8,200	6,400	5,800		8,400	8,400		5,400		
45	10,600	9,400	8,000	6,400	5,600		8,400	8,400	7,800	5,400		
50	10,200	9,000	7,800	6,400	5,400	4,400	8,400	8,400	7,800	5,400	5,200	
55	9,600	8,800	7,600	6,200	5,200	4,200	8,400	8,400	7,600	5,400	5,200	
60	9,200	8,400	7,400	5,800	5,000	4,200	8,400	8,400	7,400	5,400	5,000	4,200
65	8,600	8,200	7,400	5,600	4,800	4,000	8,400	8,400	7,400	5,400	4,800	4,000
70	8,200	7,800	7,200	5,400	4,600	4,000	8,400	8,200	7,200	5,400	4,600	4,000
75	7,800	7,600	7,200	5,200	4,400	3,800	7,400	7,800	7,200	5,400	4,600	4,000
80	7,400	7,200	7,000	5,000	4,400	3,800	6,400	6,800	7,200	5,200	4,400	3,800
85	6,800	7,000	6,800	4,800	4,200	3,800	5,600	5,800	6,200	5,000	4,400	3,800
90	6,000	6,200	6,400	4,600	4,200	3,800	4,800	5,000	5,200	4,800	4,200	3,800
95	5,400	5,400	5,600	4,600	4,000	3,600	4,000	4,200	4,400	4,800	4,200	3,600
100	4,600	4,800		4,200	4,000	3,600	3,400	3,600	3,800	4,000	4,000	3,600
105	4,000	4,200		4,200	3,800	3,600	2,800	3,000	3,200	3,600	4,000	3,600
110	3,600	3,600		4,000	3,800	3,600	2,200	2,400	2,600	3,000	3,400	3,600
115	3,200			3,800	3,600	3,600	1,800	2,000		2,600	3,000	3,200
120				3,400	3,600					2,200	2,400	2,800
125				3,000	3,200						2,000	2,200
130				2,600	2,600						1,600	1,800
135				2,200								

T1	T2	T3	T4
0/100	100/67	100/67	100/67
			100
			100
			100
			100



LATTICE EXTENSION (LUFFING)

Pounds								
Feet	102 FT MAIN BOOM				125 FT MAIN BOOM			
	28 FT		49 FT		28 FT		49 FT	
	*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°
30	5,600							
35	5,200	4,200						
40	5,000	4,000	2,800		5,200			
45	4,600	4,000	2,600		5,000	4,000		
50	4,400	3,800	2,400	2,000	4,800	4,000	2,600	
55	4,200	3,800	2,400	2,000	4,600	3,800	2,600	
60	4,000	3,600	2,200	1,800	4,400	3,800	2,400	2,000
65	3,800	3,600	2,000	1,800	4,200	3,800	2,200	1,800
70	3,800	3,600	2,000	1,800	4,000	3,600	2,200	1,800
75	3,600	3,400	1,800	1,600	4,000	3,600	2,000	1,800
80	3,400	3,400	1,800	1,600	3,800	3,600	2,000	1,800
85	3,400	3,400	1,800	1,600	3,600	3,400	1,800	1,600
90	3,200	3,200	1,600	1,600	3,600	3,400	1,800	1,600
95	3,200	3,200	1,600	1,600	3,400	3,400	1,800	1,600
100	3,000		1,600	1,400	3,000	3,200	1,600	1,600
105	3,000		1,400	1,400	2,600	2,800	1,600	1,600
110	2,800		1,400	1,400	2,000	2,200	1,600	1,400
115			1,400	1,400	1,600		1,600	1,400
120							1,400	1,400
125								1,400
130								1,400

T1	T2	T3	T4
0/100	100/67	100/67	100/67
			100
			100
			100
			100

* Luffing under load.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.



FIXED LATTICE EXTENSION

102 - 125 ft. (31 - 38.1 m)
 28 - 49 ft. (8.7 - 15 m)
 15,400 lbs. (7,000 kg)
 100% 20'4" Spread
 360°

		102 FT MAIN BOOM						125 FT MAIN BOOM					
		28 FT		49 FT		49 FT		28 FT		49 FT		49 FT	
		5°	20°	40°	5°	20°	40°	5°	20°	40°	5°	20°	40°
Feet													
20	10,000				6,000								
25	10,600				6,600								
30	10,600	10,600			6,600			8,400			5,400		
35	10,600	10,200	8,400		6,600			8,400			5,400		
40	10,600	9,800	8,200	6,400	5,800			8,400	8,400		5,400		
45	10,600	9,400	8,000	6,400	5,600			8,400	8,400	7,800	5,400		
50	10,200	9,000	7,800	6,400	5,400	4,400		8,400	8,400	7,800	5,400	5,200	
55	9,600	8,800	7,600	6,200	5,200	4,200		8,400	8,400	7,600	5,400	5,200	
60	9,200	8,400	7,400	5,800	5,000	4,200		8,400	8,400	7,400	5,400	5,000	4,200
65	8,600	8,200	7,400	5,600	4,800	4,000		7,400	8,000	7,400	5,400	4,800	4,000
70	8,000	7,800	7,200	5,400	4,600	4,000		6,200	6,800	7,200	5,400	4,600	4,000
75	7,000	7,200	7,200	5,200	4,400	3,800		5,400	5,800	6,200	5,400	4,600	4,000
80	6,000	6,200	6,600	5,000	4,400	3,800		4,400	4,800	5,200	5,000	4,400	3,800
85	5,200	5,400	5,600	4,800	4,200	3,800		3,800	4,200	4,400	4,400	4,400	3,800
90	4,400	4,600	4,800	4,600	4,200	3,800		3,000	3,400	3,800	3,800	4,200	3,800
95	3,800	4,000	4,200	4,400	4,000	3,600		2,600	2,800	3,000	3,200	3,800	3,600
100	3,200	3,400		4,000	3,800	3,600		2,000	2,200	2,400	2,600	3,200	3,600
105	2,800	2,800		3,400	3,800	3,600		1,400	1,800	1,800	2,200	2,600	3,200
110	2,400	2,400		3,000	3,200	3,600				1,400	1,800	2,200	2,600
115	2,000			2,600	2,800	3,000					1,400	1,800	2,000
120				2,200	2,400							1,400	1,600
125				1,800	2,000								
130				1,600	1,600								

	T1	0/100	100
	T2	100/67	100
	T3	100/67	100
	T4	100/67	100

LATTICE EXTENSION (LUFFING)

102 - 125 ft. (31 - 38.1 m)
 28 - 49 ft. (8.7 - 15 m)
 15,400 lbs. (7,000 kg)
 100% 20'4" Spread
 360°

		102 FT MAIN BOOM				125 FT MAIN BOOM			
		28 FT		49 FT		28 FT		49 FT	
		*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°
Feet									
30	5,600								
35	5,200	4,200							
40	5,000	4,000		2,800		5,200			
45	4,600	4,000		2,600		5,000	4,000		
50	4,400	3,800		2,400	2,000	4,800	4,000		2,600
55	4,200	3,800		2,400	2,000	4,600	3,800		2,600
60	4,000	3,600		2,200	1,800	4,400	3,800		2,400
65	3,800	3,600		2,000	1,800	4,200	3,800		2,200
70	3,800	3,600		2,000	1,800	4,000	3,600		2,200
75	3,600	3,400		1,800	1,600	4,000	3,600		2,000
80	3,400	3,400		1,800	1,600	3,800	3,600		2,000
85	3,400	3,400		1,800	1,600	3,400	3,400		1,800
90	3,200	3,200		1,600	1,600	2,800	3,200		1,800
95	3,200	3,200		1,600	1,600	2,200	2,600		1,800
100	3,000			1,600	1,400	1,800	2,000		1,600
105	2,600			1,400	1,400	1,400	1,600		1,600
110	2,200			1,400	1,400				1,600
115				1,400	1,400				1,400

	T1	0/100	100
	T2	100/67	100
	T3	100/67	100
	T4	100/67	100

* Luffing under load.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.





FIXED LATTICE EXTENSION

Pounds												
Feet	102 FT MAIN BOOM						125 FT MAIN BOOM					
	5°	20°	40°	5°	20°	40°	5°	20°	40°	5°	20°	40°
20	10,000			6,000								
25	10,600			6,600								
30	10,600	10,600		6,600			8,400					
35	10,600	10,200	8,400	6,600			8,400			5,400		
40	10,600	9,800	8,200	6,400	5,800		8,400	8,400		5,400		
45	10,600	9,400	8,000	6,400	5,600		8,400	8,400	7,800	5,400		
50	10,200	9,000	7,800	6,400	5,400	4,400	8,400	8,400	7,800	5,400	5,200	
55	9,600	8,800	7,600	6,200	5,200	4,200	8,400	8,400	7,600	5,400	5,200	
60	9,200	8,400	7,400	5,800	5,000	4,200	7,600	8,200	7,400	5,400	5,000	4,200
65	8,400	8,200	7,400	5,600	4,800	4,000	6,400	7,000	7,400	5,400	4,800	4,000
70	7,200	7,600	7,200	5,400	4,600	4,000	5,400	6,000	6,400	5,400	4,600	4,000
75	6,200	6,600	6,800	5,200	4,400	3,800	4,600	5,000	5,400	5,200	4,600	4,000
80	5,400	5,600	5,800	5,000	4,400	3,800	3,800	4,200	4,600	4,400	4,400	3,800
85	4,600	4,800	5,000	4,800	4,200	3,800	3,000	3,400	3,800	3,600	4,400	3,800
90	3,800	4,000	4,200	4,600	4,000	3,800	2,400	2,800	3,000	3,000	3,800	3,800
95	3,200	3,400	3,600	4,000	4,000	3,600	1,800	2,200	2,400	2,600	3,200	3,600
100	2,800	3,000		3,400	3,800	3,600	1,400	1,600		2,000	2,600	3,200
105	2,200	2,400		3,000	3,200	3,600			1,400	1,600	2,000	2,600
110	1,800	2,000		2,600	2,800	3,000					1,600	2,000
115	1,400			2,200	2,400	2,600						1,600
120				1,800	2,000							
125				1,400	1,600							

Trolley	Capacity
T1	0/100
T2	100/67
T3	100/67
T4	100/67



LATTICE EXTENSION (LUFFING)


Pounds								
Feet	28 FT		49 FT		28 FT		49 FT	
	*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°	*5° - 20°	*20° - 40°
30	5,600							
35	5,200	4,200						
40	5,000	4,000	2,800		5,200			
45	4,600	4,000	2,600		5,000	4,000		
50	4,400	3,800	2,400	2,000	4,800	4,000	2,600	
55	4,200	3,800	2,400	2,000	4,600	3,800	2,600	
60	4,000	3,600	2,200	1,800	4,400	3,800	2,400	2,000
65	3,800	3,600	2,000	1,800	4,200	3,800	2,200	1,800
70	3,800	3,600	2,000	1,800	4,000	3,600	2,200	1,800
75	3,600	3,400	1,800	1,600	4,000	3,600	2,000	1,800
80	3,400	3,400	1,800	1,600	3,400	3,600	2,000	1,800
85	3,400	3,400	1,800	1,600	2,800	3,200	1,800	1,600
90	3,200	3,200	1,600	1,600	2,200	2,600	1,800	1,600
95	3,000	3,200	1,600	1,600	1,800	2,000	1,800	1,600
100	2,600		1,600	1,400		1,600	1,600	1,600
105	2,000		1,400	1,400			1,400	1,600
110	1,800		1,400	1,400				1,400
115			1,400	1,400				

Trolley	Capacity
T1	0/100
T2	100/67
T3	100/67
T4	100/67


* Luffing under load.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.




32 - 55 ft. (9.8 - 13.4 m)		23,100 lbs. (10,500 kg)		Over Rear	
Feet		32 - 44 FT		44 - 55 FT	
10		25,400		26,400	
15		17,400		18,400	
20		12,200		13,200	
25		8,800		9,800	
30		6,200		7,400	
35				5,400	
40				4,000	
45				2,600	
					
T1		0		0	
T2		0/17		17/33	
T3		0/17		17/33	
T4		0/17		17/33	

* Over rear only.

32 - 55 ft. (9.8 - 13.4 m)		15,400 lbs. (7,000 kg)		Over Rear	
Feet		32 - 44 FT		44 - 55 FT	
10		24,200		25,200	
15		16,400		17,600	
20		11,400		12,600	
25		8,200		9,200	
30		5,600		6,800	
35				5,000	
40				3,600	
45				2,400	
					
T1		0		0	
T2		0/17		17/33	
T3		0/17		17/33	
T4		0/17		17/33	

* Over rear only.

32 - 55 ft. (9.8 - 13.4 m)		12,500 lbs. (5,700 kg)		Over Rear	
Feet		32 - 44 FT		44 - 55 FT	
10		23,800		24,800	
15		16,200		17,200	
20		11,200		12,400	
25		8,000		9,000	
30		5,400		6,600	
35				4,800	
40				3,400	
45				2,200	
					
T1		0		0	
T2		0/17		17/33	
T3		0/17		17/33	
T4		0/17		17/33	

* Over rear only.

THIS CHART IS ONLY A GUIDE AND SHOULD NOT BE USED TO OPERATE THE CRANE. The individual crane's load chart, operating instructions and other instructional plates must be read and understood prior to operating the crane.



Rated Lifting Capacities

IMPORTANT NOTES:

WARNING: THIS CHART IS ONLY A GUIDE. The notes below are for illustration only and should not be relied upon to operate the crane. The individual crane's load chart, operating instructions and other instruction plates must be read and understood prior to operating the crane.

1. All rated loads meet ANSI/ASME B30.5, Mobile and Locomotive Cranes. Testing and development were performed to SAEJ1063, Cantilevered Boom Crane Structures - Method of Test and SAEJ765 Crane Stability Test Code.











2. Capacities given do not include the weight of hook blocks, slings, auxiliary lifting equipment and load handling devices. Their weights must be added to the load to be lifted. When more than minimum required reeving is used, the additional rope weight shall be considered part of the load.

3. The machine shall be leveled on a firm supporting surface. Depending on the nature of the supporting surface, it may be necessary to have structural supports under the outrigger floats to spread the load to a larger bearing surface.

4. When either boom length or radius or both are between values listed, the smallest load shown at either the next larger radius or next longer or shorter boom length shall be used.




5. For outrigger operation, outriggers shall be properly extended with tires raised off the ground before operating the boom or lifting loads.

Symbols Glossary

	Frame		Steering
	Outriggers		Transmission
	Outrigger Controls		Axles
	Engine		Brakes
	Fuel Tank Capacity		Tires
	Electrical System		Suspension
	Drive		Rotation
	Lights		Boom Elevation
	Cab		Swing
	Boom		Counterweight
	Fixed Swingaway		Oil
	Tele-Swingaway		Hydraulic System
	Lattice Extension (Luffing)		Hoist
	Boom Nose		Radius
	Boom Extension		Boom Length
	Speed		Hookblock
	Grade		Gear
	Lattice Extension		Luffing Jib

GMK3050



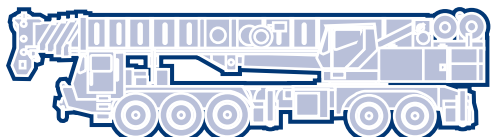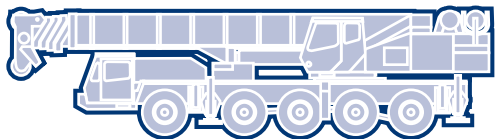

**Grove Worldwide –
World Headquarters
Grove U.S. L.L.C.**
1565 Buchanan Trail East
P.O. Box 21
Shady Grove, Pennsylvania 17256, U.S.A.
Tel: [Int + 1] (717) 597-8121
Fax: [Int + 1] (717) 597-4062
Western Hemisphere

Grove Europe Limited*
Sunderland SR4 6TT, England
Tel: [Int + 44] 191 565-6281
Fax: [Int + 44] 191 564-0442
Europe, Africa, Middle East, Asia/Pacific

Grove Europe Limited*
Telford Road, Bicester
Oxfordshire, OX6 0TZ
Tel: [Int + 44] 1869 878-890
Fax: [Int + 44] 1869 878-891
*Grove Europe Limited, Registered in England,
Number 1845128, Registered office, Crown Works,
Pallion, Sunderland, Tyne & Wear, England SR4 6TT

**Deutsche Grove GmbH
Sales and Service**
Helmholtzstrasse 12, Postfach 5026
D-40750 Langenfeld, Germany
Tel: [Int + 49] (2173) 8909-0
Fax: [Int + 49] (2173) 8909-30

Wilhelmshaven Works
Industriegelände West, Postfach 1853
D-26358 Wilhelmshaven, Germany
Tel: [Int + 49] (4421) 294-0
Fax: [Int + 49] (4421) 294-301

Bigge Crane and Rigging Co.
10700 Bigge Avenue
San Leandro, CA 94577
Phone: (888) 337-BIGGE or (510) 638-8100
Fax: (510) 639-4053
Email: info@bigge.com
Web site: www.bigge.com

Grove France S.A.
16, chaussée Jules-César, 95520 OSNY
B.P. 203, 95523 CERGY PONTOISE CEDEX
France
Tel: [Int + 33] (1) 30313150
Int: [Int + 33] (1) 30386085

Grove Asia/Pacific - Regional Office
171 Chin Swee Road
San Centre
Singapore 0316
Tel: [Int + 65] 536-6112
Fax: [Int + 65] 536-6119
Asia/Pacific, Near East

Grove China - Representative Office
Room 713, Towercrest Plaza
No. 3 Mai Zi Dian West Road
Chao Yang District
Beijing, China 100016
Tel: [Int + 86] (10) 64 67 16 90
Fax: [Int + 86] (10) 64 67 16 91

Grove Product Support
Western Hemisphere
1086 Wayne Avenue
Chambersburg, Pennsylvania USA
Tel: [Int + 1] (717) 263-5100
Fax: [Int + 1] (717) 267-0404

Europe, Africa, Middle East, Asia/Pacific
Sunderland SR4 6TT, England
Tel: [Int + 44] 191 565-6281
Parts Fax: [Int + 44] 191 510-9242
Service Fax: [Int + 44] 191 510-9560

<http://www.groworldwide.com>

Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.

Distributed By:

Form No.: GMK3050 Part No.: 3-1309 799-10M Printed in U.S.A.

