

# Lifting Capacities

Telescopic Rough Terrain Crane

## RTC-8070

70-ton (63.5 metric ton)


Boom and fly capacities for this machine are listed by the following sections:

### Fully Extended Outriggers

- Working Range Diagram (15,000 lb. Counterweight)
- 41' to 69' 6" main boom capacities, **A-max** Mode
- 41' to 127' main boom capacities, Basic Mode "B"
- 39' 6" offset fly capacities, Basic Mode "B"
- 39' 6" to 67' Two-piece offsettable fly capacities, Basic Mode "B"

### On Tires

- Working Range Diagram (15,000 lb. Counterweight)
- 41' to 69' 6" main boom capacities, **A-max** Mode
- 41' to 90' main boom capacities, Basic Mode "B"

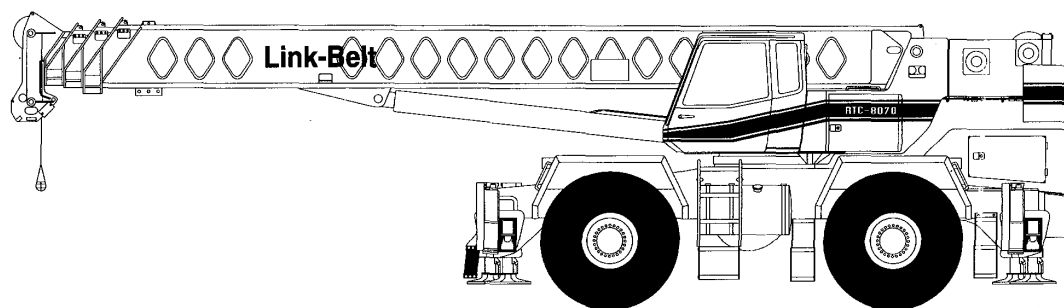

**CAUTION: This material is supplied for reference only. Operator must refer to in-cab crane rating manual to determine allowable machine lifting capacities and operating procedures.**



**Link-Belt**  
CONSTRUCTION EQUIPMENT

**Table of Contents**

<b>Page</b>	<b>Contents</b>
3-4 .....	Operating Instructions
5 .....	<del>A</del> -max Mode & Basic Mode "B" Boom Extension Diagram
5 .....	Winch Performance
5 .....	Wire Rope Strength
5 .....	Working Areas
5 .....	Hydraulic Circuit Pressure Settings
5 .....	Capacity Deductions For Auxiliary Load Handling Equipment
5 .....	Tire Inflation
5 .....	Pontoon Loadings
5 .....	Outrigger Spread

**Fully Extended Outriggers**

6 .....	Working Range Diagram
7 .....	Main Boom Lifting Capacities
8 .....	Fly Lifting Capacities

**On Tires**

9 .....	Working Range Diagram
10-11 .....	Main Boom Lifting Capacities - 29.5 x 25 (28-PR) Tires



## OPERATING INSTRUCTIONS

### GENERAL:

1. Rated lifting capacities in pounds as shown on lift charts pertain to this crane as originally manufactured and normally equipped. Modifications to the crane or use of optional equipment other than that specified can result in a reduction of capacity.
2. Construction equipment can be dangerous if improperly operated or maintained. Operation and maintenance of this crane must be in compliance with the information in the Operator's, Parts, and Safety Manuals supplied with this crane. If these manuals are missing, order replacements through the distributor.
3. The operator and other personnel associated with this crane shall read and fully understand the latest applicable American National Standards ASME B30.5 safety standards for cranes.
4. The rated lifting capacities are based on crane standing level on firm supporting surface.

### SET UP:

1. The crane shall be leveled on a firm supporting surface. Depending on the nature of the supporting surface, it may be necessary to have structural supports under the outrigger pontoons or tires to spread the load to a larger bearing surface.
2. When making lifts on outriggers, all tires must be free of supporting surface. All outrigger beams must be extended to the same length; fully retracted, intermediate extended, or fully extended.
3. When making lifts on tires, they must be inflated to the recommended pressure. (See Operation note 20 and Tire Inflation.)
4. When operating on tires over the side, do not exceed 66 degree maximum boom angle. Loss of backward stability will occur causing a backward tipping condition.
5. When operating with 0 pound counterweight, do not swing over side on tires unless boom is fully retracted and boom angle is above 45° .
6. For required parts of line, see Wire Rope Capacity and Winch Performance.
7. Before setting up on intermediate outriggers, retracted outriggers, or tires, refer to Working

Range Diagrams and rated lifting capacities to determine allowable crane configurations.

### OPERATION:

1. Rated lifting capacities at rated radii shall not be exceeded. Do not tip the crane to determine allowable loads. For concrete bucket operation, weight of bucket and load shall not exceed 80% of rated lifting capacities. For clamshell bucket operation, weight of the bucket and bucket contents is restricted to a maximum weight of 7000 pounds or 80% of rated lifting capacity, whichever is less. For magnet operation, weight of the magnet and load is restricted to a maximum weight of 7000 pounds or 80% of rated lifting capacity, whichever is less. For clamshell and magnet operation, maximum boom length is restricted to 60 ft. and the boom angle is restricted to a minimum of 35° . Lifts with either fly erected are prohibited for both clam and magnet operation.
2. Rated lifting capacities shown on fully extended outriggers do not exceed 85% of the tipping loads. Rated lifting capacities shown on intermediate extended or fully retracted outriggers are determined by the formula, rated load = (tipping load - 0.1 X load factor)/1.25. Rated lifting capacities shown on tires do not exceed 75% of the tipping loads. Tipping loads are determined by SAE crane stability test code J-765.
3. Rated lifting capacities in the shaded areas are based on structural strength or hydraulic limitations and have been tested to meet minimum requirements of SAE J-1063 cantilevered boom crane structures - method of test. The rated lifting capacities in non-shaded areas are based on stability ratings. Some capacities are limited by a maximum obtainable 78° boom angle.
4. Rated lifting capacities include the weight of the hook ball/block, slings, bucket, magnet and auxiliary lifting devices. Their weights must be subtracted from the listed rated capacity to obtain the net load which can be lifted. Rated lifting capacities include the deduct for either fly stowed on the base of the boom. For deducts of either fly



# Link-Belt

CONSTRUCTION EQUIPMENT



## Operating Instructions (*continued*)

- erected, but not used, see Capacity Deductions For Auxiliary Load Handling Equipment.
5. Rated lifting capacities are based on freely suspended loads. No attempt shall be made to move a load horizontally on the ground in any direction.
  6. Rated lifting capacities are for lift crane service only.
  7. Do not operate at any radii or boom lengths (minimum or maximum) where capacities are not listed. At these positions, the crane can tip or cause boom failure.
  8. The maximum loads which can be telescoped are not definable because of variation in loadings and crane maintenance, but it is permissible to attempt retraction and extension within the limits of the applicable load rating chart.
  9. For main boom capacities when either boom length or radius or both are between values listed, proceed as follows:
    - a. For boom lengths not listed, use rating for next longer boom length or next shorter boom length, whichever is smaller.
    - b. For load radii not listed, use rating for next larger radius.
  10. The user shall operate at reduced ratings to allow for adverse job conditions, such as: soft or uneven ground, out of level conditions, wind, side loads, pendulum action, jerking or sudden stopping of loads, hazardous conditions, experience of personnel, traveling with loads, electrical wires, etc. Side load on boom or fly is dangerous and shall be avoided.
  11. Rated lifting capacities do not account for wind on suspended load or boom. Rated capacities and boom length shall be appropriately reduced as wind velocity approaches 20 mph.
  12. When making lifts with auxiliary head machinery, the effective length of the boom increases by 2 feet.
  13. Power sections of boom must be extended in accordance with boom mode "A" or "B". In boom mode "B" all power sections must be extended or retracted equally.
  14. The least stable rated working area depends on the configuration of the crane setup.
  15. Rated lifting capacities are based on correct reeving. Deduction must be made for excessive reeving. Any reeving over minimum required (see Wire Rope Capacity) is considered excessive and must be accounted for when making lifts. Use Working Range Diagram to estimate the extra feet of rope then deduct 1 lb for each extra foot of wire rope before attempting to lift a load.
  16. The loaded boom angle combined with the boom length give only an approximation of the operating radius. The boom angle, before loading, should be greater to account for deflection. For main boom capacities, the loaded boom angle is for reference only. For fly capacities, the load radius is for reference only.
  17. For fly capacities with main boom length less than 127 ft. and greater than 100 ft., the rated capacities are determined by the boom angle using the 127 ft. boom and fly chart. For angles not shown use the next lower boom angle to determine the rated capacity.
  18. For fly capacities with main boom length less the 100 ft., the rated capacities are determined by the boom angle only using the 100 ft. boom and fly chart. For angles not shown, use the next lower boom angle to determine the rated capacity.
  19. The 41 ft. boom length structural capacities are based on boom fully retracted. If the boom is not fully retracted, do not exceed capacities shown for the 50 ft. boom length.
  20. Rated lifting capacities on tires depend on tire capacity, condition of tires, and tire air pressure. On tire capacities require lifting from main boom head only on a smooth and level surface. Pick and carry operations are restricted to a maximum speed of 1 mph. The boom must be centered over the front of the crane with two position travel swing lock engaged and the load must be restrained from swinging. Lifts with any fly erected on tires are prohibited. For correct tire pressure, see Tire Inflation.

### DEFINITIONS:

1. Load Radius: Horizontal distance from a projection of the axis of rotation to the supporting surface, before loading, to the center of the vertical hoist line or tackle with load applied.
2. Loaded Boom Angle:  $\angle^\circ$  The angle between the boom base section and horizontal with freely suspended load at the rated radius.
3. Working Area: Area measured in a circular arc about the center line of rotation as shown on the Working Area Diagram.
4. Freely Suspended Load: Load hanging free with no direct external force applied except by the hoist line.
5. Side Load: Horizontal side force applied to the lifted load either on the ground or in the air.
6. No Load Stability Limit: The radius or boom angle beyond which it is not permitted to position the boom because the crane can overturn without any load on the hook.
7. Load Factor: Load applied at the boom tip which gives the same moment effect as the boom mass.



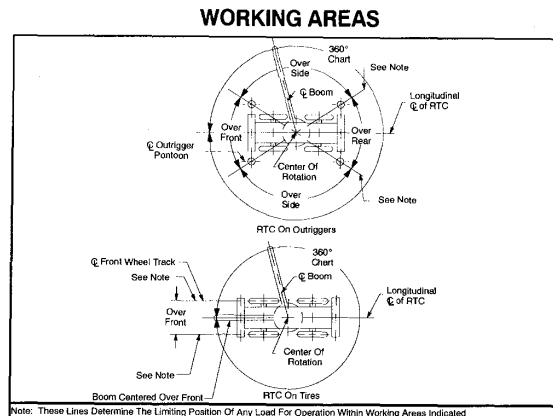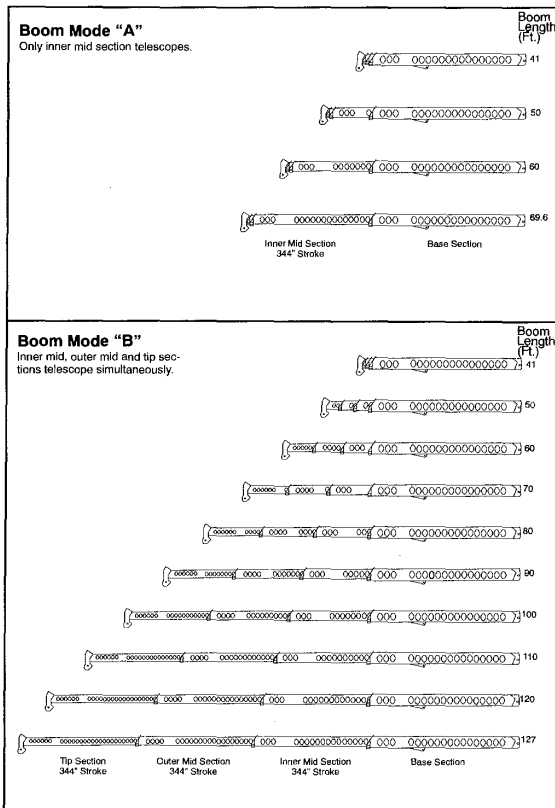

**HYDRAULIC CIRCUIT PRESSURE SETTINGS**

Function	Pressure (PSI)
Front And Rear Winch	3500
Outriggers	3000
Boom Hoist	3500
Telescope	3000
Swing	1500
Steering	2500
Pilot Control	500
Counterweight Removal	1700

**CAPACITY DEDUCTIONS FOR AUXILIARY LOAD HANDLING EQUIPMENT**

Load Handling Equipment	Weight (Lbs.)
Auxiliary Head Attached	100
40 Ton Quick Reeve 4 Sheave Hook Block (See Hook Block For Actual Weight)	720
60 Ton Quick Reeve 4 Sheave Hook Block (See Hook Block For Actual Weight)	1100
70 Ton Quick Reeve 5 Sheave Hook Block (See Hook Block For Actual Weight)	1400
8.5 Ton Hook Ball (See Hook Ball For Actual Weight)	360

**Lifting From Main Boom With:**

39.5 Ft. Or 67 Ft. Fly Stowed On Base (See Operation Note 4)	0
39.5 Ft. Offset Fly Erected But Not Used	4100
67 Ft. Offset Fly Erected But Not Used	8200

**Lifting From 39.5 Ft. Offset Fly With:**

27.5 Ft. Fly Tip Erected But Not Used	PROHIBITED
27.5 Ft. Fly Tip Stowed On 39.5 Ft. Offset Fly	PROHIBITED

Note: Capacity deductions are for Link-Belt supplied equipment only.

**WINCH PERFORMANCE**

Wire Rope Layer	Winch Line Pulls		Drum Rope Capacity (Ft.)	
	Two Speed Winch		Layer	Total
	Low Speed Available Lbs.*	High Speed Available Lbs.		
1	17,117	8,453	114	114
2	15,737	7,771	124	238
3	14,563	7,192	134	372
4	13,552	6,692	144	516
5	12,672	6,258	154	670
6	N/A	N/A	164	834

\*Maximum lifting capacity: Type RB Rope=12,920 Type ZB Rope=15,600

**WIRE ROPE CAPACITY**

Maximum Lifting Capacities Based On Wire Rope Strength

Parts of Line	3/4"		Notes
	Type RB	Type ZB	
1	12,920*	15,600	Capacities shown are in pounds and working loads must not exceed the ratings on the capacity charts in the Crane Rating Manual. Study Operator's Manual for wire rope inspection procedures. *Use of swivel end with 1 part of line is not recommended.
2	25,840	31,200	
3	38,760	46,800	
4	51,680	62,400	
5	64,600	78,000	
6	77,520	93,600	
7	90,440	109,200	
8	103,360	124,800	
9	116,280	140,400	
10	129,200	156,000	

LBCE DESCRIPTION  
TYPE RB 18 X 19 Rotation Resistant - Compact Strand - High Strength, Preformed, Right Regular Lay  
TYPE ZB 36 X 7 Rotation Resistant - Extra Improved Plow Steel - Right Regular Lay

**TIRE INFLATION**

Tire Size	Operation	Tire Pressure (PSI)
29.5 x 25-28 PR	1 MPH Stationary	75 75

**PONTOON LOADINGS**

Maximum Pontoon Load:	Maximum Pontoon Ground Bearing Pressure:
94,000 Lbs.	208 PSI


**OUTRIGGER SPREAD**

Position	Distance
Fully Retracted	(120.75") 10'-3/4"
Intermediate Extended	(196.75") 16'-4 3/4"
Fully Extended	(276") 23'-0"



**Link-Belt**  
CONSTRUCTION EQUIPMENT

**WORKING RANGE DIAGRAM**

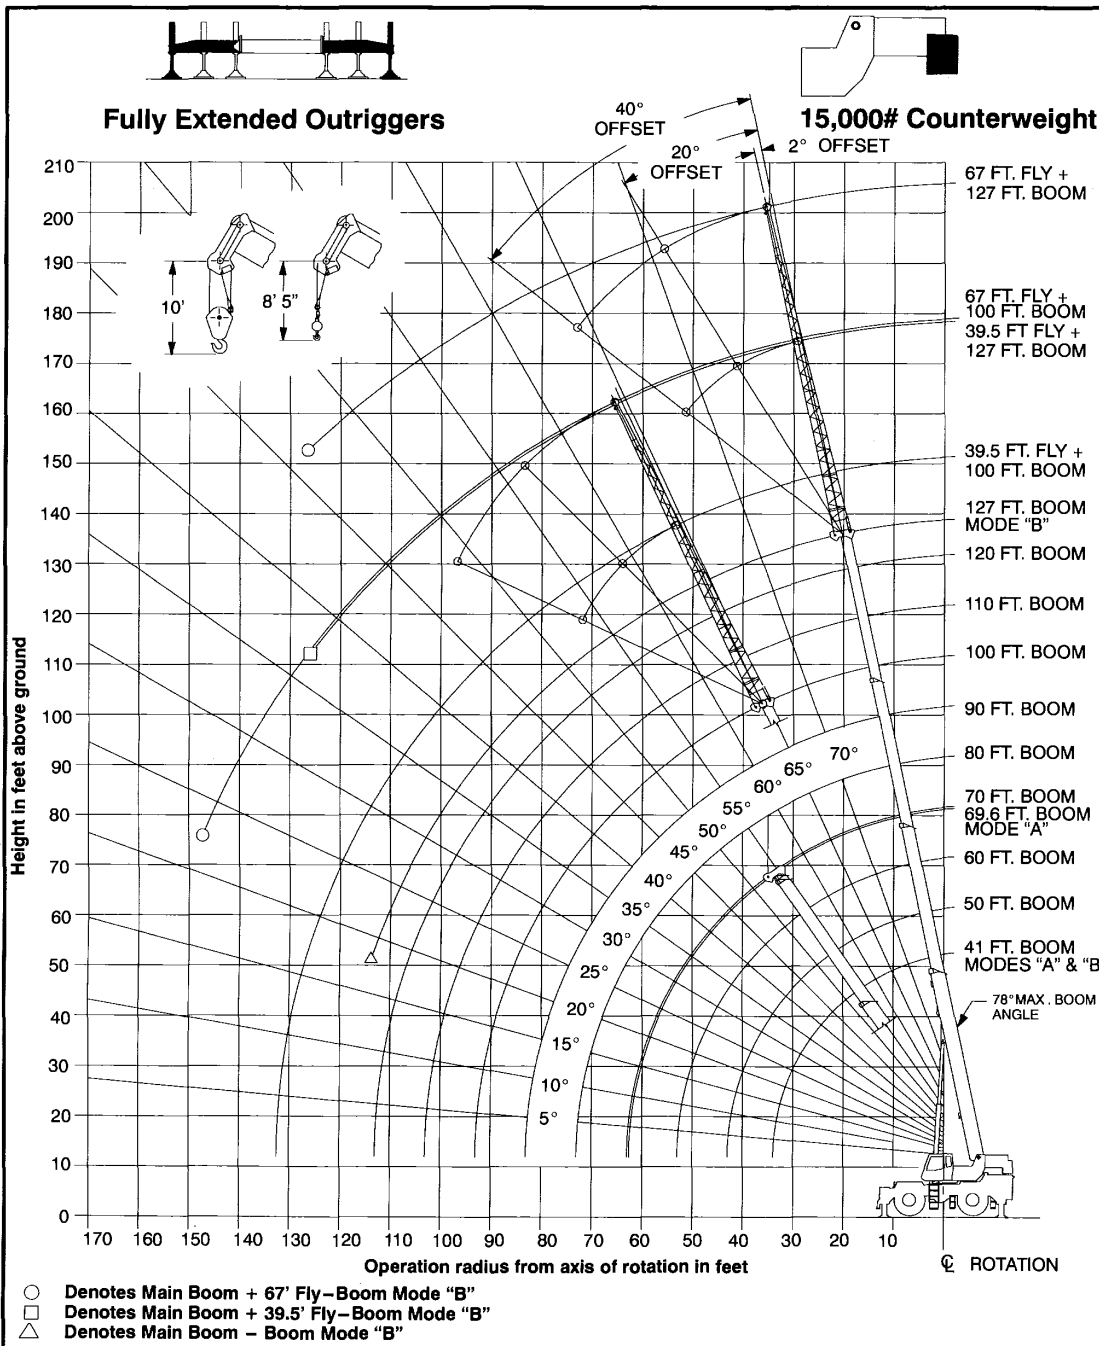

Note: Boom and fly geometry shown are for unloaded condition and crane standing level on firm supporting surface. Boom deflection, subsequent radius and boom angle change must be accounted for when applying load to hook.

**WARNING**

Do Not Lower The Boom Below The Minimum Boom Angle For No Load Stability As Shown In The Lift Charts For The Boom Lengths Given. Loss Of Stability Will Occur Causing A Tipping Condition.





### Fully Extended Outriggers - Main Boom Capacities

**Rated Lifting Capacities In Pounds Fully Extended Outriggers See Set Up Note 2.**

Load Radius (Ft.)	15,000# MAIN BOOM "A"					
	41 Ft.			50 Ft.		
	∠ °	360°	Over Front	∠ °	360°	Over Front
9	70.5	140,000	140,000	73.0	75,100	75,100
10	69.0	128,600	128,600	70.5	75,100	75,100
12	66.0	116,500	118,900	67.0	75,100	75,100
15	61.0	100,100	101,800	67.0	75,100	75,100
20	52.5	74,700	74,700	60.5	74,100	74,100
25	42.5	57,600	57,600	53.5	57,000	57,000
30	29.0	45,900	45,900	45.5	45,500	45,500
35				36.0	37,200	37,200
40				23.0	27,200	29,300
Min. Boom Angle/Cap.	0 (34.0)	21,100	21,100	0 (43.0)	15,900	15,900

**Rated Lifting Capacities In Pounds Fully Extended Outriggers See Set Up Note 2.**

Load Radius (Ft.)	15,000# MAIN BOOM "B"					
	41 Ft.			50 Ft.		
	∠ °	360°	Over Front	∠ °	360°	Over Front
9	70.5	140,000	140,600	73.0	38,000	38,000
10	69.0	128,600	128,600	70.5	38,000	38,000
12	66.0	116,500	118,900	67.0	38,000	38,000
15	61.0	100,100	101,800	67.0	38,000	38,000
20	52.5	74,700	74,700	60.5	38,000	38,000
25	42.5	57,600	57,600	53.0	38,000	38,000
30	29.0	45,900	45,900	45.5	38,000	38,000
35				36.0	38,000	38,000
40				23.0	28,700	30,800
Min. Boom Angle/Cap.	0 (34.0)	21,100	21,100	0 (43.0)	14,900	14,900

Load Radius (Ft.)	60 Ft.			69.6 Ft.			Load Radius (Ft.)
	∠ °	360°	Over Front	∠ °	360°	Over Front	
	10	76.5	74,000	74,000	76.5	43,900	
12	74.5	74,000	74,000	74.5	43,900	43,900	
15	71.5	74,000	74,000	74.5	43,900	43,900	
20	66.0	73,600	73,600	70.0	43,900	43,900	
25	60.5	56,600	56,600	65.5	43,900	43,900	
30	55.0	45,100	45,100	61.0	37,900	37,900	
35	48.5	36,600	36,900	56.0	33,200	33,200	
40	41.0	28,600	28,800	50.5	26,200	26,300	
45	32.5	21,100	22,900	44.5	20,700	22,500	
50	21.0	16,900	18,500	37.5	16,600	18,100	
55				29.5	13,500	14,800	
60				18.5	10,900	12,100	
Min. Boom Angle/Cap.	0 (53.0)	10,800	10,800	0 (62.6)	7,300	7,300	

Load Radius (Ft.)	60 Ft.			70 Ft.			Load Radius (Ft.)
	∠ °	360°	Over Front	∠ °	360°	Over Front	
	10	76.0	38,000	38,000	76.5	38,000	
12	74.0	38,000	38,000	74.5	38,000	38,000	
15	71.0	38,000	38,000	70.0	38,000	38,000	
20	66.0	38,000	38,000	65.5	38,000	38,000	
25	60.5	38,000	38,000	61.0	38,000	38,000	
30	54.5	38,000	38,000	55.5	37,700	38,000	
35	48.5	37,300	38,000	50.5	29,500	31,700	
40	41.0	29,200	31,400	44.5	25,600	25,600	
45	32.5	23,600	25,400	38.0	19,700	21,200	
50	21.0	19,300	20,800	30.0	16,400	17,700	
55				19.5	13,800	15,000	
60							
Min. Boom Angle/Cap.	0 (53.0)	10,500	10,500	0 (63.0)	7,600	7,600	

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
 ∠ Loaded Boom Angle In Degrees.  
 ( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
 ∠ Loaded Boom Angle In Degrees.  
 ( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

**Rated Lifting Capacities In Pounds Fully Extended Outriggers See Set Up Note 2.**

Load Radius (Ft.)	15,000# MAIN BOOM "B"					
	80 Ft.		90 Ft.		100 Ft.	
	∠ °	360°	Over Front	∠ °	360°	Over Front
15	76.5	38,000	38,000	77.0	37,400	37,400
20	73.0	38,000	38,000	75.0	38,000	38,000
25	69.5	36,000	38,000	72.0	38,000	38,000
30	65.5	38,000	38,000	68.5	37,900	37,900
35	61.0	37,900	38,000	65.0	33,900	33,900
40	56.5	29,700	31,900	61.5	29,900	30,500
45	52.0	24,100	25,800	57.5	24,300	26,000
50	47.0	19,900	21,400	53.5	20,000	21,600
55	41.5	16,600	18,000	49.0	16,800	18,100
60	35.5	14,000	15,200	44.5	14,200	15,400
65	28.0	12,000	13,000	39.5	12,100	13,100
70	18.0	10,200	11,200	33.5	10,400	11,400
75				26.5	8,900	9,800
80				17.0	7,600	8,400
85						
90						
Min. Boom Angle/Cap.	0 (73.0)	5,500	5,500	0 (83.0)	3,900	3,900

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
 ∠ Loaded Boom Angle In Degrees.  
 ( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

**Rated Lifting Capacities In Pounds Fully Extended Outriggers See Set Up Note 2.**

Load Radius (Ft.)	15,000# MAIN BOOM "B"					
	110 Ft.		120 Ft.		127 Ft.	
	∠ °	360°	Over Front	∠ °	360°	Over Front
25	76.0	29,400	29,400	77.5	23,300	23,300
30	73.5	26,200	26,200	75.0	23,300	23,300
35	70.5	23,500	23,500	72.5	21,500	21,500
40	68.0	21,200	21,200	70.0	19,400	19,400
45	65.0	19,200	19,200	67.5	17,600	17,600
50	62.0	17,400	17,400	65.0	15,800	15,800
55	59.0	15,800	15,800	62.0	14,400	14,400
60	55.5	14,400	14,500	59.5	13,200	13,200
65	52.0	12,400	13,300	56.5	12,200	12,200
70	48.5	10,600	11,600	53.5	10,700	11,200
75	44.5	9,100	10,000	50.0	9,200	10,100
80	40.5	7,900	8,700	46.5	7,900	8,800
85	36.0	6,800	7,500	43.0	6,800	7,600
90	31.0	5,800	6,500	39.0	5,900	6,600
95	24.5	5,000	5,600	34.5	5,100	5,700
100	16.0	4,200	4,800	29.5	4,300	4,900
105				24.0	3,600	4,200
110				15.5	3,000	3,600
115						
Min. Boom Angle/Cap.	0 (103.0)	1,700	1,700	0 (113.0)	900	900



Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
 ∠ Loaded Boom Angle In Degrees.  
 ( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.  
 \* This capacity based on maximum obtainable boom angle.



# Link-Belt

CONSTRUCTION EQUIPMENT

## Fully Extended Outriggers - Fly Capacities - Boom Mode "B"

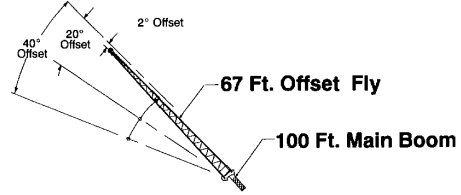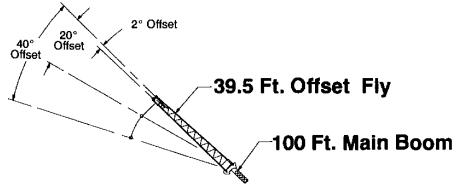


**Rated Lifting Capacities In Pounds Fully Extended Outriggers See Set Up Note 2.**

Load Radius (Ft.)	FULL				FULL				Load Radius (Ft.)
	2° Offset		20° Offset		40° Offset		40° Offset		
	∠	360°	∠	360°	∠	360°	∠	360°	
30	77.0	13,900							30
35	75.0	13,400							35
40	73.0	12,800							40
45	71.0	12,200	78.0	9,400					45
50	69.0	11,700	74.0	8,900					50
55	67.0	11,100	71.5	8,500	76.0	6,600			55
60	64.5	10,600	69.5	8,100	73.5	6,400			60
65	62.5	10,100	67.0	7,800	71.0	6,300			65
70	60.0	9,700	64.5	7,400	68.5	6,100			70
75	57.5	9,200	62.0	7,200	66.0	6,000			75
80	55.0	8,700	59.5	6,900	63.5	5,800			80
85	52.5	8,300	57.0	6,600	60.5	5,700			85
90	49.5	7,300	54.0	6,400	57.5	5,600			90
95	46.5	6,500	51.5	6,200	54.5	5,500			95
100	43.0	5,700	48.0	6,000	51.5	5,500			100
105	39.5	5,000	45.0	5,500	47.5	5,400			105
110	36.0	4,400	41.0	4,800	43.5	5,100			110
115	32.0	3,900	36.5	4,200	38.5	4,400			115
120	27.5	3,400	32.0	3,700					120
125	22.0	2,900	26.0	3,100					125
130	14.0	2,500							130
Min. Boom Angle/Cap.	0	600	0	600	0	700	Min. Boom Angle/Cap.		

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

∠ Loaded Boom Angle In Degrees.

( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parentheses) Are In Feet.

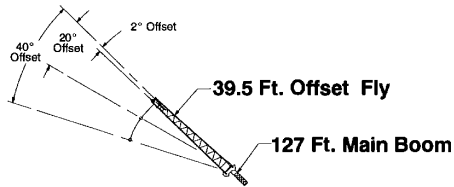

**Rated Lifting Capacities In Pounds Fully Extended Outriggers See Set Up Note 2.**

Load Radius (Ft.)	FULL				FULL				Load Radius (Ft.)
	2° Offset		20° Offset		40° Offset		40° Offset		
	∠	360°	∠	360°	∠	360°	∠	360°	
40	77.0	8,300							40
45	75.5	7,900							45
50	73.5	7,500							50
55	72.0	7,100							55
60	70.0	6,800	77.0	4,700					60
65	68.5	6,200	75.5	4,500					65
70	66.5	5,800	73.5	4,200					70
75	64.5	5,500	71.5	4,000					75
80	62.5	5,200	69.5	3,900	78.0	3,000			80
85	60.5	4,900	67.5	3,700	74.0	3,000			85
90	58.5	4,600	65.5	3,500	72.0	2,900			90
95	56.5	4,400	63.5	3,400	69.5	2,800			95
100	54.5	4,200	61.5	3,300	67.5	2,700			100
105	52.0	3,900	59.0	3,200	65.0	2,700			105
110	50.0	3,800	57.0	3,100	62.5	2,600			110
115	47.5	3,600	54.5	3,000	60.0	2,600			115
120	45.0	3,400	52.0	2,900	57.0	2,500			120
125	42.5	3,300	49.0	2,800	54.0	2,500			125
130	39.5	3,100	46.5	2,700	50.5	2,500			130
135	36.5	2,800	43.0	2,600	47.0	2,500			135
140	33.0	2,400	39.5	2,600	42.5	2,500			140
145	29.0	2,100	35.5	2,500					145
150	24.5	1,800	30.5	2,100					150
155			24.0	1,700					155


**WARNING**

Do Not Lower 67 Ft. Offset Fly In Working Position Below 22.5 Degrees Main Boom Angle Unless Main Boom Length Is 94 Ft. Or Less, Since Loss Of Stability Will Occur Causing A Tipping Condition.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

∠ Loaded Boom Angle In Degrees.

( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parentheses) Are In Feet.

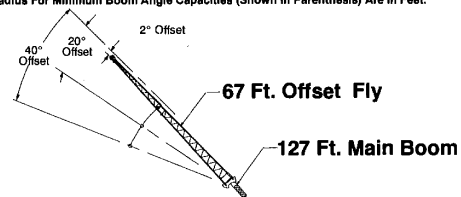

**Rated Lifting Capacities In Pounds Fully Extended Outriggers See Set Up Note 2.**

Load Radius (Ft.)	FULL				FULL				Load Radius (Ft.)
	2° Offset		20° Offset		40° Offset		40° Offset		
	∠	360°	∠	360°	∠	360°	∠	360°	
35	78.0*	8,300							35
40	76.5	8,300							40
45	75.0	8,300							45
50	73.5	8,300							50
55	71.5	8,300	78.0*	8,200					55
60	70.0	8,300	76.0	8,000					60
65	68.5	8,300	74.5	7,800					65
70	67.0	8,300	72.5	7,800	76.0	6,200			70
75	65.0	8,300	71.0	7,400	74.5	6,100			75
80	63.0	7,100	69.0	7,200	72.5	6,000			80
85	60.5	6,800	67.0	7,000	70.5	5,800			85
90	58.5	6,000	65.5	6,800	68.5	5,700			90
95	56.5	5,600	63.0	6,300	66.5	5,700			95
100	54.5	5,100	61.0	5,800	64.0	5,600			100
105	52.0	4,700	58.5	5,300	62.0	5,500			105
110	49.5	4,100	56.5	4,900	59.5	5,100			110
115	47.0	3,500	54.0	4,500	57.0	4,700			115
120	44.0	3,000	51.0	4,000	54.0	4,300			120
125	41.5	2,600	48.5	3,500	51.0	3,800			125
130	38.5	2,100	45.5	3,000	48.0	3,200			130
135			42.5	2,500	44.5	2,700			135
			39.0	2,100	40.5	2,200			135

**WARNING**

Do Not Lower 39.5 Ft. Offset Fly In Working Position Below 37.0 Degree Main Boom Angle Unless Main Boom Length Is 104 Ft. Or Less, Since Loss Of Stability Will Occur Causing A Tipping Condition.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".

∠ Loaded Boom Angle In Degrees.

\* This capacity based on maximum obtainable boom angle.

**Rated Lifting Capacities In Pounds Fully Extended Outriggers See Set Up Note 2.**

Load Radius (Ft.)	FULL				FULL				Load Radius (Ft.)
	2° Offset		20° Offset		40° Offset		40° Offset		
	∠	360°	∠	360°	∠	360°	∠	360°	
50	76.5	5,500							50
55	75.5	5,500							55
60	74.0	5,500							60
65	73.0	5,500							65
70	71.5	5,500	77.5	4,200					70
75	70.0	5,300	76.0	4,000					75
80	68.5	5,100	74.5	3,900					80
85	67.0	4,900	73.0	3,600					85
90	65.5	4,800	71.5	3,800	77.0	2,900			90
95	64.0	4,800	70.0	3,500	75.0	2,800			95
100	62.0	4,300	68.0	3,400	73.5	2,800			100
105	60.5	3,900	66.5	3,300	71.5	2,700			105
110	58.5	3,600	64.5	3,200	70.0	2,600			110
115	56.5	3,200	63.0	3,100	68.0	2,600			115
120	54.5	2,900	61.0	3,000	66.0	2,600			120
125	52.5	2,700	59.0	2,900	64.0	2,500			125
130	50.5	2,400	57.0	2,600	61.5	2,500			130
135	48.5	2,200	54.5	2,300	59.5	2,500			135
140			52.5	2,100	57.0	2,300			140
145			50.0	1,800	54.5	2,000			145
150			47.5	1,700	51.5	1,800			150
155			48.5	1,600	48.5	1,600			155

**WARNING**

Do Not Lower 67 Ft. Offset Fly In Working Position Below 46.5 Degree Main Boom Angle Unless Main Boom Length Is 94 Ft. Or Less, Since Loss Of Stability Will Occur Causing A Tipping Condition.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".


∠ Loaded Boom Angle In Degrees.







## WORKING RANGE DIAGRAM

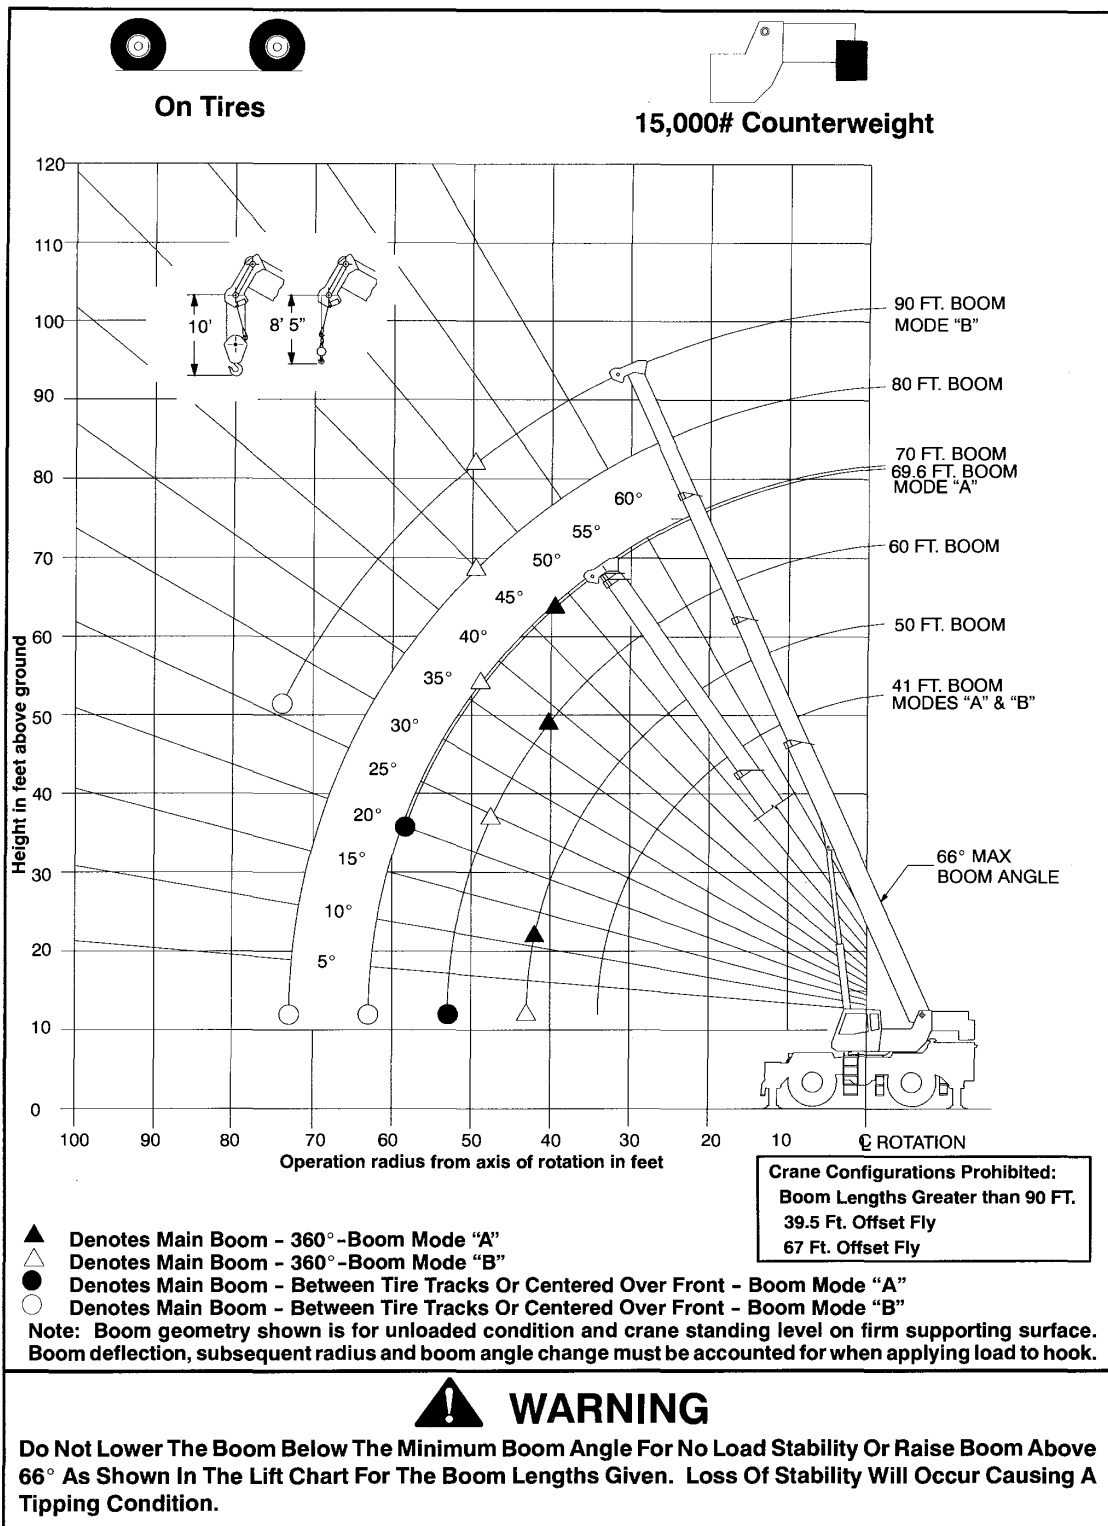

# Link-Belt

CONSTRUCTION EQUIPMENT

## On Tires (29.5 x 25 - 28 Ply) - Main Boom Capacities (15,000 lb. Counterweight)

**On Tire Capacities In Pounds**  
 Tire Pressure: See Page 5  
 Stationary Capacities  
 Over Front Between Tire Tracks  
 See Operation Note 20.

ON TIRES 15,000# MAIN BOOM "A"

Load Radius (Ft.)	41 Ft.		50 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
15	61.0	54,900			15
20	52.5	42,500	60.5	42,000	20
25	42.0	29,200	53.0	28,600	25
30	29.0	20,800	45.0	20,500	30
35			36.0	15,100	35
40			23.0	11,400	40
Min. Boom Angle/Cap.	0 (34.0)	16,200	0 (43.0)	9,500	Min. Boom Angle/Cap.

**On Tire Capacities In Pounds**  
 Tire Pressure: See Page 5  
 Stationary Capacities  
 Over Front Between Tire Tracks  
 See Operation Note 20.

ON TIRES 15,000# MAIN BOOM "B"

Load Radius (Ft.)	41 Ft.		50 Ft.		60 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
15	61.0	54,900					15
20	52.5	42,500	60.0	38,000			20
25	42.0	29,200	53.0	29,900	60.5	30,300	25
30	29.0	20,800	45.0	21,700	54.5	22,100	30
35			36.0	16,300	48.0	16,800	35
40			23.0	12,500	41.0	13,000	40
45					32.5	10,200	45
50					20.5	8,100	50
Min. Boom Angle/Cap.	0 (34.0)	16,200	0 (43.0)	10,600	0 (53.0)	6,900	Min. Boom Angle/Cap.

Load Radius (Ft.)	60 Ft.		69.6 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
25	60.5	28,000	65.0	27,600	25
30	54.5	20,000	60.5	19,800	30
35	48.0	14,800	55.5	14,500	35
40	41.0	11,100	50.0	10,900	40
45	32.5	8,400	44.0	8,200	45
50	21.0	6,200	37.5	6,100	50
55			29.5	4,400	55
Min. Boom Angle/Cap.	0 (53.0)	5,100	20.0 (59.2)		Min. Boom Angle/Cap.

Load Radius (Ft.)	70 Ft.		80 Ft.		90 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
25	65.0	30,600					25
30	60.5	22,400	64.5	22,600			30
35	55.5	17,100	60.5	17,300	64.5	17,400	35
40	50.0	13,400	56.0	13,500	60.5	13,600	40
45	44.5	10,600	51.5	10,900	57.0	11,000	45
50	37.5	8,400	46.5	8,700	53.0	8,900	50
55	30.0	6,700	41.5	7,000	48.5	7,200	55
60	19.0	5,300	35.0	5,600	44.0	5,800	60
65			28.0	4,400	39.0	4,600	65
70			18.0	3,400	33.0	3,600	70
Min. Boom Angle/Cap.	0 (63.0)	4,500	0 (73.0)	2,900	26.0 (75.3)		Min. Boom Angle/Cap.

Note: Refer to Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
 ∠ Loaded Boom Angle In Degrees.  
 ( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parentheses) Are In Feet.

Note: Refer to Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
 ∠ Loaded Boom Angle In Degrees.  
 ( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parentheses) Are In Feet.

**On Tire Capacities In Pounds**  
 Tire Pressure: See Page 5  
 Pick & Carry Capacities  
 (1mph) Boom Centered Over Front  
 See Operation Note 20.

ON TIRES 15,000# MAIN BOOM "A"

Load Radius (Ft.)	41 Ft.		50 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
15	61.0	51,400			15
20	52.5	39,100	80.0	38,700	20
25	42.0	29,200	53.0	28,600	25
30	29.0	20,800	45.0	20,500	30
35			36.0	15,100	35
40			23.0	11,300	40
Min. Boom Angle/Cap.	0 (34.0)	16,200	0 (43.0)	9,500	Min. Boom Angle/Cap.

**On Tire Capacities In Pounds**  
 Tire Pressure: See Page 5  
 Pick & Carry Capacities  
 (1mph) Boom Centered Over Front  
 See Operation Note 20.

ON TIRES 15,000# MAIN BOOM "B"

Load Radius (Ft.)	41 Ft.		50 Ft.		60 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
15	61.0	51,400					15
20	52.5	39,100	80.0	38,000			20
25	42.0	29,200	53.0	29,900	60.5	30,300	25
30	29.0	20,800	45.0	21,700	54.5	22,100	30
35			36.0	16,300	48.0	16,800	35
40			23.0	12,500	41.0	13,000	40
45					32.5	10,200	45
50					20.5	8,100	50
Min. Boom Angle/Cap.	0 (34.0)	16,200	0 (43.0)	10,600	0 (53.0)	6,900	Min. Boom Angle/Cap.

Load Radius (Ft.)	60 Ft.		69.6 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
25	60.5	28,000	65.0	27,500	25
30	54.5	20,000	60.5	19,800	30
35	48.0	14,800	55.5	14,400	35
40	41.0	11,100	50.0	10,900	40
45	32.5	8,300	44.0	8,200	45
50	21.0	6,200	37.5	6,000	50
55			29.5	4,400	55
Min. Boom Angle/Cap.	0 (53.0)	5,100	20.0 (59.2)		Min. Boom Angle/Cap.

Load Radius (Ft.)	70 Ft.		80 Ft.		90 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
25	65.0	30,600					25
30	60.5	22,400	64.5	22,600			30
35	55.5	17,100	60.5	17,300	64.5	17,400	35
40	50.0	13,400	56.0	13,500	60.5	13,600	40
45	44.5	10,600	51.5	10,900	57.0	11,000	45
50	37.5	8,400	46.5	8,700	53.0	8,900	50
55	30.0	6,700	41.5	7,000	48.5	7,200	55
60	19.0	5,300	35.0	5,600	44.0	5,800	60
65			28.0	4,400	39.0	4,600	65
70			18.0	3,400	33.0	3,600	70
Min. Boom Angle/Cap.	0 (63.0)	4,500	0 (73.0)	2,900	26.0 (75.3)		Min. Boom Angle/Cap.

Note: Refer to Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
 ∠ Loaded Boom Angle In Degrees.  
 ( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parentheses) Are In Feet.

Note: Refer to Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
 ∠ Loaded Boom Angle In Degrees.  
 ( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parentheses) Are In Feet.





**On Tires (29.5 x 25 - 28 Ply) - Main Boom Capacities (15,000 lb. Counterweight)**

**On Tire Capacities In Pounds**  
Tire Pressure: See Page 5  
Stationary Capacities-360 Degrees  
See Operation Note 20.

360° ON TIRES 15,000# MAIN BOOM "A"

Load Radius (Ft.)	41 Ft.		50 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
15	61.0	33,500			15
20	52.5	20,500	60.0	20,000	20
25	42.0	13,500	53.0	13,100	25
30	29.0	9,100	45.0	8,800	30
35			35.5	5,800	35
40			23.0	3,700	40
Min. Boom Angle/Cap.	0 (34.0)	6,500	11.5 (42.5)		Min. Boom Angle/Cap.

**WARNING**  
Do Not Raise The Boom Above 66 Degrees. Loss Of Backward Stability Will Occur Causing A Tipping Condition.

Load Radius (Ft.)	60 Ft.		69.6 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	
25	60.0	12,800	65.0	12,500	25
30	54.5	8,500	60.0	8,300	30
35	48.0	5,600	55.0	5,400	35
40	41.0	3,500	49.5	3,300	40
Min. Boom Angle/Cap.	38.0 (41.7)		48.0 (41.3)		Min. Boom Angle/Cap.

**WARNING**  
Do Not Raise The Boom Above 66 Degrees. Loss Of Backward Stability Will Occur Causing A Tipping Condition.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
∠ Loaded Boom Angle In Degrees.  
( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.

**On Tire Capacities In Pounds**  
Tire Pressure: See Page 5  
Stationary Capacities-360 Degrees  
See Operation Note 20.

360° ON TIRES 15,000# MAIN BOOM "B"

Load Radius (Ft.)	41 Ft.		50 Ft.		60 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
15	61.0	33,500	66.5	34,100			15
20	52.5	20,500	60.0	21,300			20
25	42.0	13,500	53.0	14,200	60.0	14,700	25
30	29.0	9,100	45.0	9,900	54.5	10,400	30
35			35.5	6,900	48.0	7,400	35
40			23.0	4,700	41.0	5,200	40
45					32.5	3,600	45
50							50
Min. Boom Angle/Cap.	0 (34.0)	6,500	0 (43.0)	3,600	24.5 (48.6)		Min. Boom Angle/Cap.

**WARNING**  
Do Not Raise The Boom Above 66 Degrees. Loss Of Backward Stability Will Occur Causing A Tipping Condition.

Load Radius (Ft.)	70 Ft.		80 Ft.		90 Ft.		Load Radius (Ft.)
	∠°	Load	∠°	Load	∠°	Load	
25	65.0	15,000					25
30	60.0	10,800	64.5	10,900			30
35	55.5	7,800	60.5	8,000	64.0	8,100	35
40	50.0	5,600	56.0	5,800	60.5	6,000	40
45	44.0	3,900	51.5	4,200	56.5	4,300	45
50			46.5	2,900	52.5	3,000	50
Min. Boom Angle/Cap.	37.0 (50.3)		45.0 (51.3)		51.0 (52.1)		Min. Boom Angle/Cap.

**WARNING**  
Do Not Raise The Boom Above 66 Degrees. Loss Of Backward Stability Will Occur Causing A Tipping Condition.

Note: Refer To Page 5 For "Capacity Deductions For Auxiliary Load Handling Equipment".  
∠ Loaded Boom Angle In Degrees.  
( ) Reference Radius For Minimum Boom Angle Capacities (Shown In Parenthesis) Are In Feet.



# Link-Belt

CONSTRUCTION EQUIPMENT

---

## Bigge Crane and Rigging Co.

10700 Bigge Avenue  
San Leandro, CA 94577  
Phone: (888) 337-BIGGE or (510) 638-8100  
Fax: (510) 639-4053  
Email: info@bigge.com  
Web site: www.bigge.com

## Link-Belt Construction Equipment Company Lexington, Kentucky

© Link-Belt is a registered trademark. All rights reserved. Copyright 1999.

We are constantly improving our products and therefore reserve the right to change designs and specifications.

